



New Product Announcement

Product Overview

I.F. Engineering Corp (IFE) latest Solid-State switch design features greater than 95 dB Isolation at 70 MHz and operates over a frequency range of 20 to 1000 MHz.

It is designed for both commercial and military applications and has a high reliability option.

Its compact design of 1.04 cubic inches (excluding connectors and solder terminals) is small in size compared to other available products.

We offer standard configurations but our specialty is providing uniquely engineered products that will meet your specific needs.

Product Features

Solid-Sate Design

Frequency Range: 20 to 1000 MHz

Isolation: > 95 dB at 70 MHz

Insertion Loss: < 1.2 dB at 70

VSWR In/Out: 1.5:1


Switching Speed: < 100 μ s

Max. Power: +20 dBm

Wide Voltage Range: +3 to +28 VDC


Current: <15 mA at 28 VDC (On)

Connectors: SMA female and solder terminals

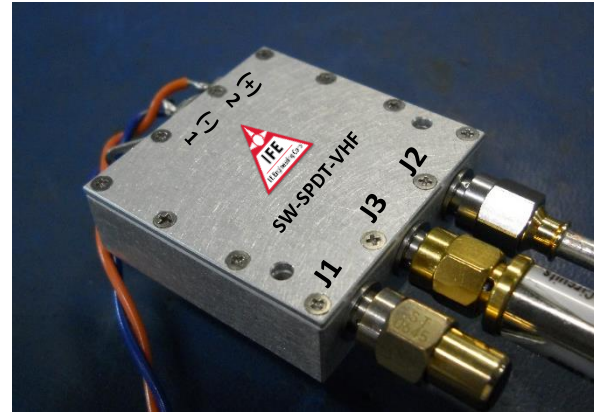

SW-SPDT-VHF

Isolation

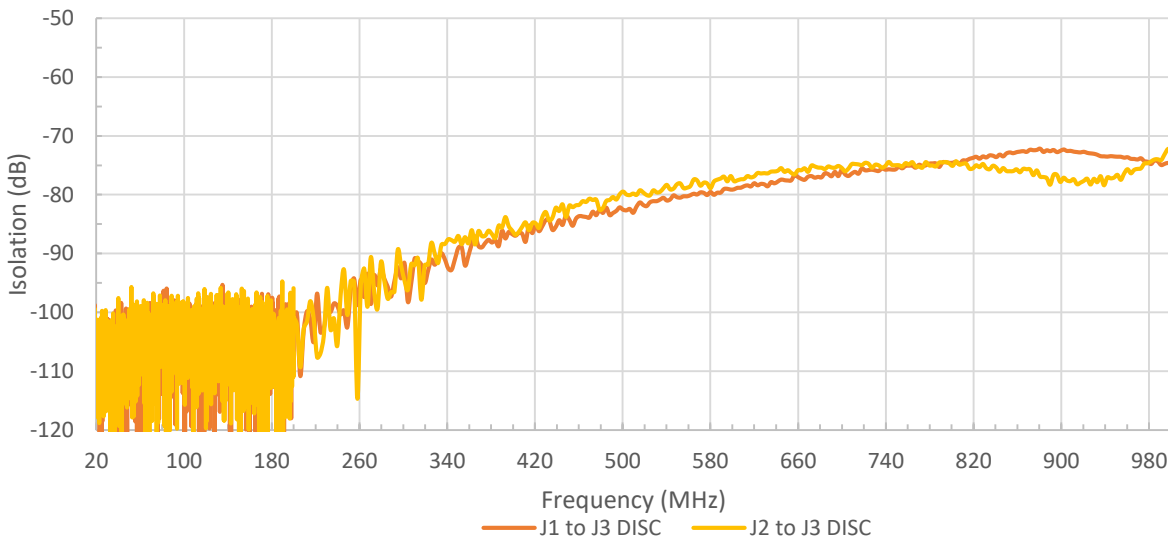

Legend
DISC - Disconnected
CON - Connected

YOUR CHALLENGE *IS OUR PROGRESS*

A Veteran Owned Small Business




3 Foshay Road Dudley, MA 01571 Telephone (860) 935-0280 FAX (508) 943-0400 www.ifengineering.com




New Product Announcement


Insertion Loss

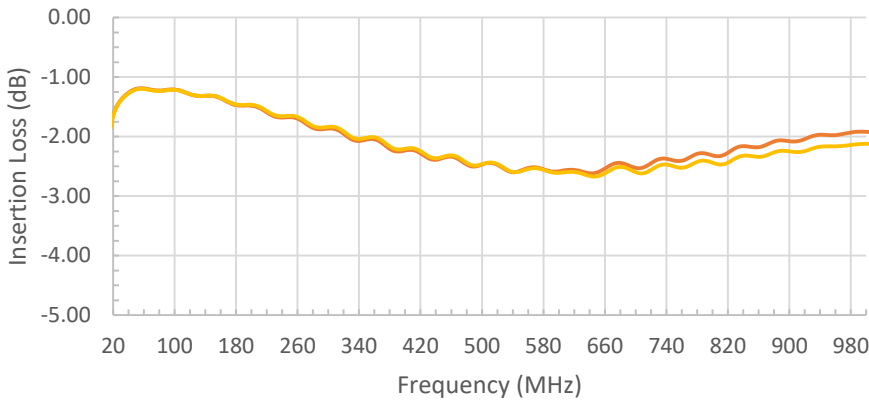

— J1 to J3 CON — J2 to J3 CON

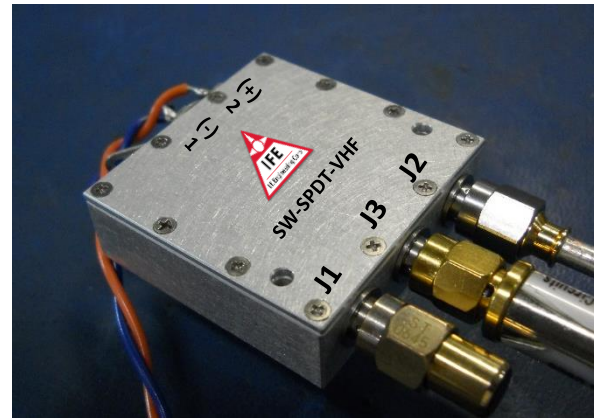

SW-SPDT-VHF

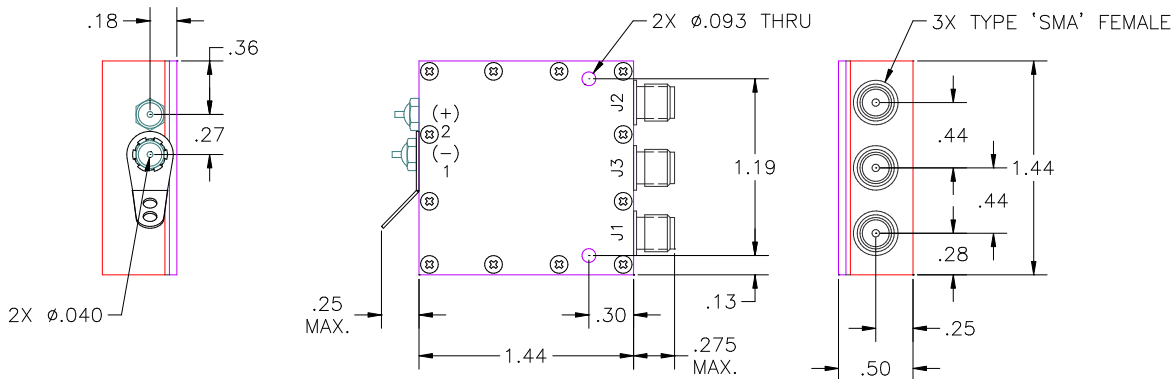

	LEVEL	RF CONN.
PIN 1	HIGH (OPEN CIRCUIT)	J3 TO J1
	LOW (GROUND)	J3 TO J2
PIN 2	+28V	

All dimensions are in inches.

YOUR CHALLENGE *IS OUR PROGRESS*

A Veteran Owned Small Business



3 Foshay Road Dudley, MA 01571 Telephone (860) 935-0280 FAX (508) 943-0400 www.ifengineering.com